


TRANS petro - T composite hose

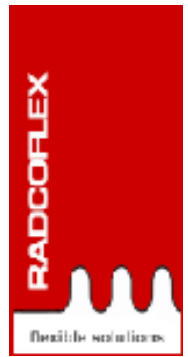

description

Composite hose made from polypropylene fabrics and films with an abrasion resistant PVC coated fabric cover. Inner and outer wires are galvanized mild steel.

classification

Fuel and Oil Group

colour code

Black outer cover.

principal applications

TRANS petro-T is a suction and discharge hose specially designed for the transfer of petroleum products by road Tankers, Rail tankers and Loading gantries.

manufacture

Complies with BS 5842 Type 2A hose where electrical continuity is maintained by both hose wires being securely connected to the fittings (less than 10 ohms). The hose contains a barrier layer for 100% aromatic hydrocarbons.

temperature

Depending on the conveyant -20 °C to +80 °C.

standard production lengths

20.00 metres



Specifications

nominal bore mm	outside dia mm	bend radius mm	pressure nominal psi bar	weight per meter Kg / m
50	61	80	100 7	1.55
65	76	90	100 7	2.40
75	88	125	100 7	2.95
100	112	220	100 7	3.90

All pressure are based on a safety factor of 4 : 1

Complies with BS 5842:1980 Standard on demand.

data sheet – CM 013.4

RADCOFLEX

*For further information on Radcoflex
email : sales@radcoflexindia.com
Web : www.radcoflexindia.com*